


- High brightness 0.4" LED display: 0~99999
- Max. input frequency: 7KHz
- 1~2 Alarms (Hi or Lo) programmable
- Reset count by external control terminal available
- High stability, non-flammable case (PC), high safety
- Can show total minutes and operating circles(7 display types)


SPECIFICATION

- ◆ Display Screen: High brightness red LED;10.16mm(0.4")
- ◆ Display Range: 0~99999
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Alarm Action: "≥ (Hi) on" or "< (Lo) on"
- ◆ Alarm Run Time: 1~99 sec
- ◆ Relay Contact: AC 277V / 7A; DC 30V / 7A
- ◆ Temperature Coefficient: 100ppm / °C (0~60°C)
- ◆ Operating Temperature: 0~60°C
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70°C
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC 100~240V; DC 22~50V
- ◆ Power Consumption: <8.5VA (all functions output)
- ◆ Surge Test: 1.5KVac / 1min (Input / Power)

DISPLAY TYPES

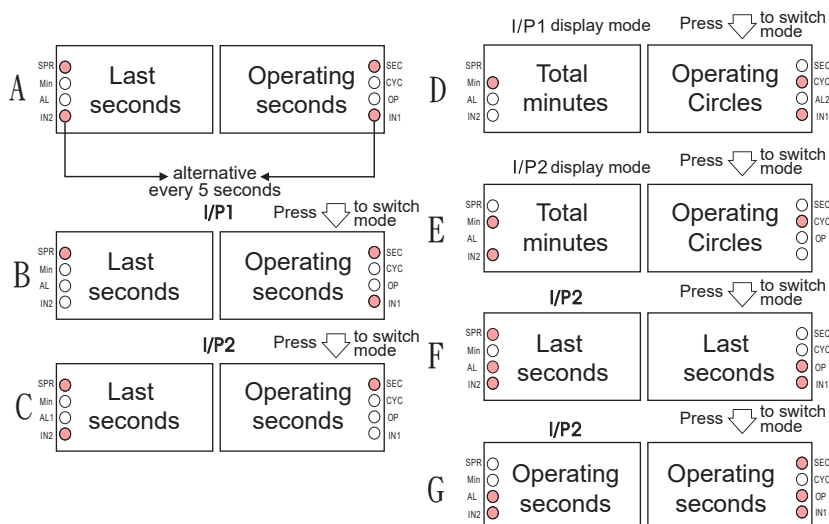

WIRING CONNECTION

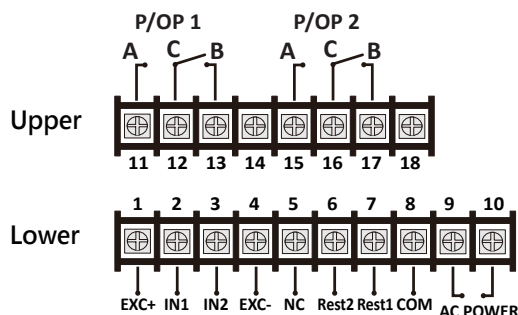

Terminal block:

Pulse/OP : Pulse output
Alarm : Alarm output

EXC+ : Power + Rest2 : IN2 reset
IN1 : Signal Input1 Rest1 : IN1 reset
IN2 : Signal Input2 COM : Common
EXC- : Power - AC POWER : Power Input