


- High brightness 0.56" LED display: -199999~999999
- Flow unit selectable: Liter / Gal / C.C. / m³
- K factor programmable for pulse output per liter
- N / R / C relay output mode selectable
- 2~4 alarms output programmable (Hi or Lo) / Analog output (15 bit resolution) / RS-485 communication optional (The above option can exist together)
- Reset / Pause count by external control terminal available
- High stability, non-flammable case (PC), high safety
- CE approval

SPECIFICATION


- ◆ Display Screen: High brightness red LED; 14.22mm (0.56")
- ◆ Max. Input Frequency: 7KHz
- ◆ Display Range: 0~99999
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Alarm Action: "≥ (Hi) on" or "< (Lo) on"
- ◆ Relay Contact: AC 277V / 7A; DC 30V / 7A
- ◆ Relay Output Mode: N / R / C (depends on 1st alarm setpoint)
- ◆ Alarm Run Time: 1~99 sec
- ◆ Analog Output Resolution: 15 bit
- ◆ Output Response Time: <250 msec (0~90%)
- ◆ Output Capability: Voltage Output: <20mA
Current Output: <10V
- ◆ Communication: RS-485 Modbus RTU mode
- ◆ Baud Rate: 38400 / 19200 / 9600 / 4800 bps
- ◆ Temperature Coefficient: 100ppm / °C (0~60°C)
- ◆ Operating Temperature: 0~60°C
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70°C
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC 100~240V; AC/DC 22~60V
- ◆ Power Consumption: 8.5VA (all functions output)
- ◆ Surge Test: 1.5KVac / 1min (Input / Power)

WIRING CONNECTION

●2 Alarms Output

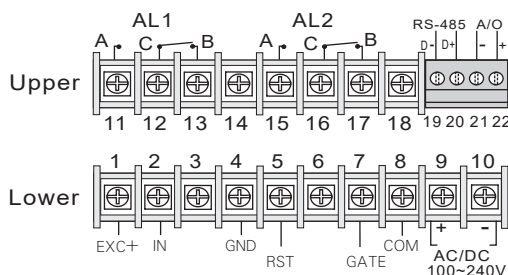

●4 Alarms Output

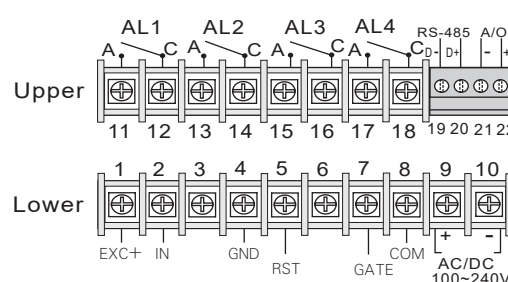

ORDER INFORMATION

CFM-C - [Code 1] - [Code 2] - [Code 3] [Code 4] [Code 5]

Code 1	Input Signal	Code 1	Input Signal
N5	NPN(5V)	VC	Pick-up 50mV~1.5V
N2	NPN(12V)	VD	Pick-up 500mV~15V
P5	PNP(5V)	VE	DC 24Vp
P2	PNP(12V)	O	Option
CT	Contact		

Code 2	Aux. Power
A	AC/DC 100~240V
D	AC/DC 22~60V

Code 2	Alarm Output	Code 2	Alarm Output
N	None	O1	1 Open Collect
R1	1 Relay	O2	2 Open Collect
R2	2 Relays	O3	3 Open Collect
R3	3 Relays	O4	4 Open Collect
R4	4 Relays		

Code 4	Analog Output
N	None
A	4~20mA
V	0~10V
O	Option

Code 5	RS-485
N	None
Y	Yes

**1: NPN(5V),PNP(5V) offers excitation power DC5V; NPN(12V),PNP(12V) offers excitation power DC12V for flow sensors using.
 2: Please use PNP/NPN(5V/12V) or DC24Vp for DC pulse input.