


- T-series.(Wire length 1M)
- Split Core, easy installation(36mm).
- Primary Input 400A~600A.
- Secondary output 1Aac/ 5Aac.
- Safe operation.
- Please do not use while the circuit is open.
Be sure to connect the load device at first.



SPECIFICATION

◆ Frequency:	50~60 Hz
◆ Rated Current:	400A to 600A loads
◆ Rated Output:	1A/ 5A (AC)
◆ Accuracy:	Class 0.5 or 1 from 20% to 120% of rated current
◆ Phase angle:	Less than 2 degrees at 50% of rated current
◆ Insulation Voltage:	600 Vac
◆ Maximum Primary Voltage:	5000 Vac (Insulated Conductor)
◆ Dielectric Strength:	2.5KV/ 1mA/ 1min
◆ Operating Temperature:	-15°C to 60°C
◆ Operating Humidity:	<85%
◆ Case Material:	PC/UL94~V0
◆ Bobbin:	PBT
◆ Core:	Permalloy
◆ Internal Structure:	Epoxy
◆ Burden:	400/ 1A Ø36mm 400/ 5A Ø36mm 500/ 1A Ø36mm 500/ 5A Ø36mm 600/ 1A Ø36mm 600/ 5A Ø36mm

DIMENSION

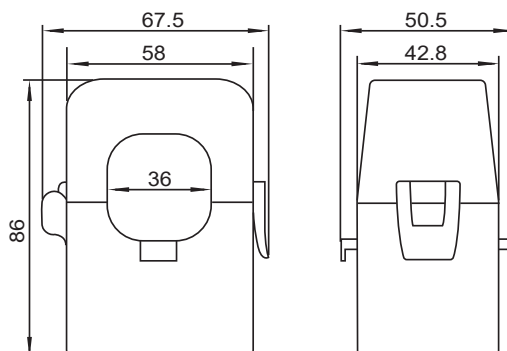

ORDER INFORMATION

DCSCT-36T - Code1 - Code2 - Code3

Code1	Input Signal	Code2	Output	Code3	Wire Length
400	400 Aac	1	1 Aac	N	1 M
500	500 Aac	5	5 Aac	O	Option
600	600 Aac				