


- Output signal: 3 wire type resistance
- Measuring range: 250mm, 500mm, **1000mm**,
- Small size, excellent linear accuracy



SPECIFICATION


- ◆ Stroke Range: 250; 500; 1000mm
- ◆ Wire Material: 0.6mm SUS304 with Nylon coated
- ◆ Resistance: **$5K\Omega \pm 10\%$**
- ◆ Independent Linear: $\pm 0.25\%$
- ◆ Repeatability Accuracy: $\pm 0.02\%$
- ◆ Max. Speed: 500 mm/sec
- ◆ Vibration: 10~2000 Hz, 10g
- ◆ Power Supply: AC/DC 30V
- ◆ Power Consumption: 2W
- ◆ Storage Temp.: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- ◆ Protection: IP50

ORDER INFORMATION

HPS-S - **Code1**

Code1	Distance
025	250 mm
05	500 mm
10	1000 mm

DIMENSION

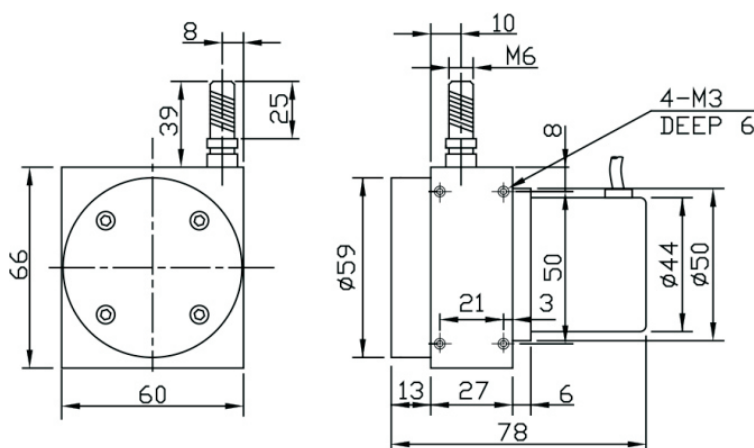

WIRING CONNECTION

