

- Output signal: 3 wire type resistance
- Measuring range: 500mm, 750mm, 1000mm, 1250mm, 1500mm, 2000mm, 3000mm, **4000mm**
- Small size, excellent linear accuracy



SPECIFICATION


- ◆ Stroke Range: 500; 700; 1000; 1250; 1500; 2000; 3000; 4000 mm
- ◆ Wire Material: 0.6mm SUS304 with Nylon coated
- ◆ Resistance: **$5K\Omega \pm 10\%$**
- ◆ Independent Linear: $\pm 0.25\%$
- ◆ Repeatability Accuracy: $\pm 0.02\%$
- ◆ Max. Speed: 1000 mm/sec
- ◆ Vibration: 10~2000 Hz, 10g
- ◆ Power Supply: AC/DC 30V
- ◆ Power Consumption: 2W
- ◆ Storage Temp.: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- ◆ Protection: IP64

ORDER INFORMATION

HPS-M - **Code1**

Code1	Distance		
05	500 mm	20	2000 mm
075	750 mm	30	3000 mm
10	1000 mm	40	4000 mm
125	1250 mm		
15	1500 mm		

DIMENSION

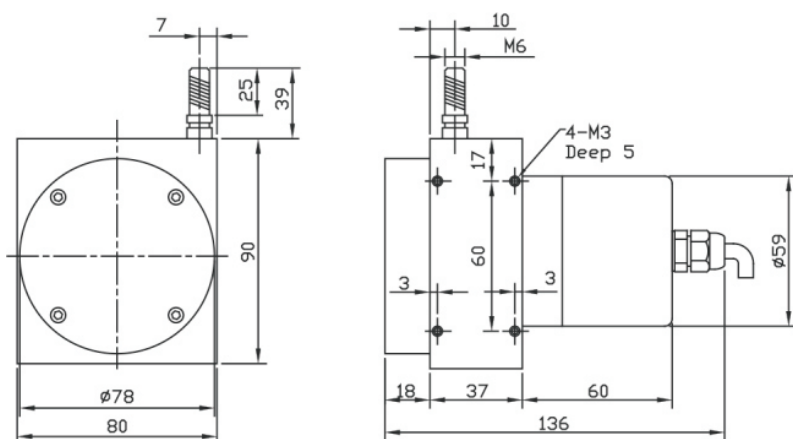

WIRING CONNECTION

