

- Output signal: 3 wire type resistance
- Measuring range: 3000mm, 4000mm, 5000mm, 6000mm, 8000mm
- Small size, excellent linear accuracy



SPECIFICATION


- ◆ Stroke Range: 3000; 4000; 5000; 6000; 8000mm
- ◆ Wire Material: 1mm SUS304 with Nylon coated
- ◆ Resistance: $5K\Omega \pm 10\%$
- ◆ Independent Linear: $\pm 0.25\%$
- ◆ Repeatability Accuracy: $\pm 0.02\%$
- ◆ Max. Speed: 600 mm/sec
- ◆ Vibration: 10~2000 Hz, 10g
- ◆ Power Supply: AC/DC 30V
- ◆ Power Consumption: 2W
- ◆ Storage Temp.: $-40^{\circ}\text{C} \sim 135^{\circ}\text{C}$
- ◆ Protection: IP64

ORDER INFORMATION

HPS-L - Code1

Code1	Distance
30	3000 mm
40	4000 mm
50	5000 mm
60	6000 mm
80	8000 mm

DIMENSION

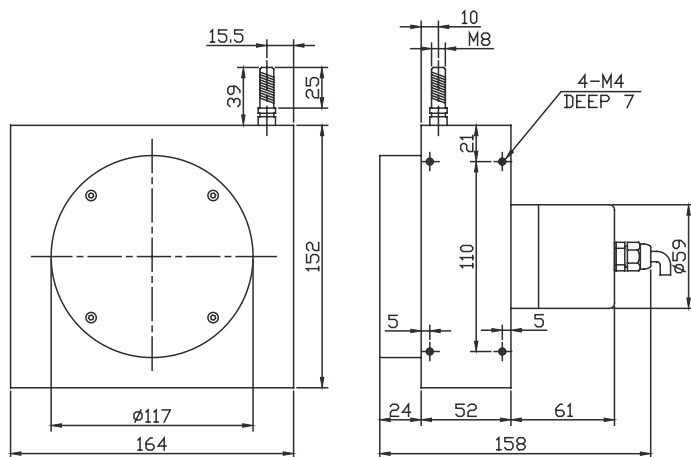

WIRING CONNECTION

