

- The high-sensitivity gas detection probe has stable signal and can accurately measure the PPM CO concentration with high accuracy.
- Wide measuring range, 0-1000ppm(default ). 0-2000ppm.
- High accuracy  $\pm 3\%$ F.S. Repeatability: 2%.
- 4-20mA signal output.
- Power supply: DC24V.
- The product adopts a wall-mounted waterproof shell, which is easy to install and has a high degree of protection.



**SPECIFICATION**

- ◆ Power supply: 24V DC
- ◆ Average power consumption: 0.18W
- ◆ Output signal: 4~20mA
- ◆ CO measurement range: 0~1000ppm(default)
- ◆ CO Resolution: 1ppm
- ◆ CO accuracy:  $\pm 3\%$ F.S.
- ◆ Zero drift:  $\pm 3$ ppm
- ◆ Operating temperature:  $-20^{\circ}\text{C}\sim+50^{\circ}\text{C}$
- ◆ Working humidity: 15%~90%RH(non-condensing)
- ◆ Stability:  $<2\%$ / month
- ◆ Response time:  $\leq 30$ s
- ◆ Data update time:  $\geq 5$ min
- ◆ Repeatability:  $\leq 2\%$
- ◆ Pressure range: 90~110KPA

**ORDER INFORMATION**


DCCO- Code1 - Code2 - Code3

Code1	Output Signal	Code2	Type
4A6	4~20mA Current	2	Wall-mounted

Code3	Measuring Range
1000	1000ppm
2000	2000ppm

**WIRING CONNECTION**

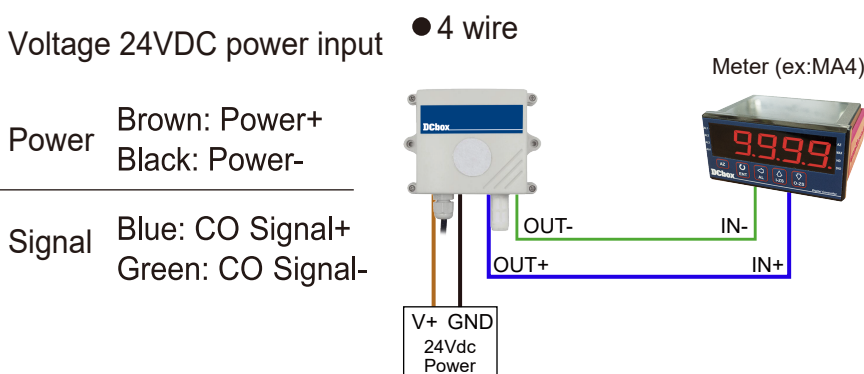

**DIMENSION**

