

- Material: Aluminum alloy steel
- Measuring range: 3~5Kgs / 10~25Kgs / 30~50Kgs / 100/ 150/ 200/ 300/ 500 Kgs
- Easily installation



SPECIFICATION


- ◆ Output Signal: 2.0mV/V $\pm$ 0.25%
- ◆ Zero Load of Balance: $\pm$ 1% F.S.
- ◆ Non-Linear: $\pm$ 0.03%
- ◆ Hysteresis: $\pm$ 0.03%
- ◆ Repeatability: $\pm$ 0.03%
- ◆ Thermal of Sensitivity: $\leq$ 0.002%
- ◆ Thermal of Zero: $\leq$ 0.002%
- ◆ Operating Temperature: -10°C ~70°C
- ◆ Temp. Compensation: -10°C ~50°C
- ◆ Applicable Load: 150%
- ◆ Input Resistance: 350 ohm $\pm$ 5 ohm
- ◆ Output Resistance: 350 ohm $\pm$ 3 ohm
- ◆ Surge Test: $\geq$ 5000M ohm (50V DC)
- ◆ Power Supply: 10V DC
- ◆ Wire Length: 1 M
- ◆ Wire Diameter: 5 mm

ORDER INFORMATION

LAK - Code1


Code1	LOAD(kg)		
05	5 Kgs	100	100 Kgs
10	10 Kgs	150	150 Kgs
20	20 Kgs	200	200 Kgs
25	25 Kgs	300	300 Kgs
30	30 Kgs	500	500 Kgs
50	50 Kgs		

WIRING CONNECTION

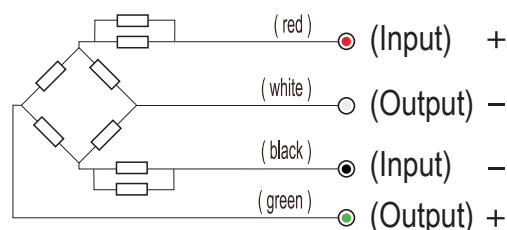

DIMENSION

(Under 50Kgs)

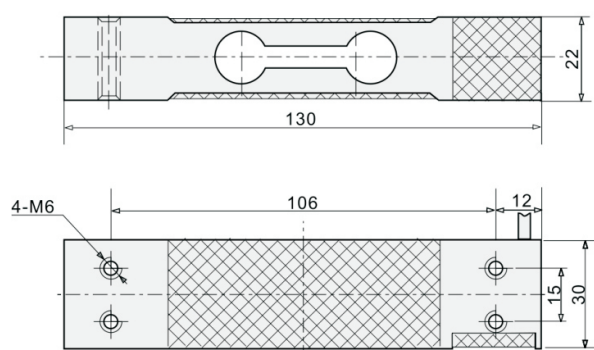

(Over 100Kgs)

