


- Special conductive plastic resistance and track position, easily installation.
- Dual bearing and spring system, reduce the side load error occur
- Special rear transmission, auto return function available
- Small size, excellent linear accuracy

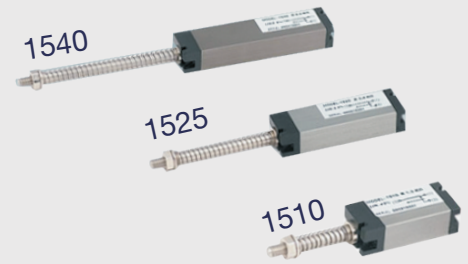

SPECIFICATION


- ◆ Stroke Range: 10mm; 25mm; 40mm
- ◆ Resistance: 10mm: 1.3KΩ; 25mm: 3.4KΩ; 40mm: 6.0KΩ
- ◆ Independent Linear: ±2%
- ◆ Repeatability Accuracy: 0.002mm
- ◆ Power Supply Current: ≤ 1μA
- ◆ Max. Current: 10mA
- ◆ Power Supply: 24V
- ◆ Storage Temp.: -40°C ~ 135°C
- ◆ Life: 100*106movements

ORDER INFORMATION

DCK-15 Code 1

Code 1	Dimensions / Distance
10	33.50mm(Housing)/29.30mm(Distance)
25	48.50mm(Housing)/47.30mm(Distance)
40	63.50mm(Housing)/66.30mm(Distance)

ACCESSORIES

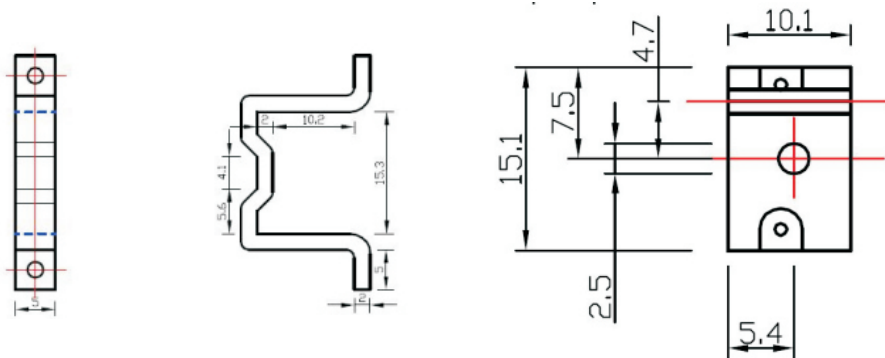

DIMENSION

Model	DCK-10	DCK-25	DCK-40
Mechanical Travel (B)	12.20mm	27.40mm	42.40mm
Housing Length (C)	33.50mm	48.50mm	63.50mm
Fully Extended (D)	29.30mm	47.30mm	58.50mm
Fixed Screw Hold (E)	28.80mm	43.20mm	58.30mm
Total Length (F)	62.80mm	95.80mm	129.80mm

