

- Switching input AC 110/ 220V, 50/ 60 Hz
- 240/ 360 Watt, single output
- Overload protection
- Over-voltage protection
- Short circuit protection
- DIN rail / Wall bracket mounting



SPECIFICATION


- ◆ Input Voltage: AC 110/220V ± 15%
- ◆ Input Frequency: 47~63 Hz
- ◆ Inrush Current: 22A / 110Vac; 44A / 220Vac
- ◆ Output Voltage: 12 Vdc ±10%
24 Vdc ±10%
48 Vdc ±10%
- ◆ Output Watt: 240 / 360 Watt
- ◆ Loading Current (240Watt): 12 Vdc / 20A
24 Vdc / 10A
48 Vdc / 5A
- ◆ Loading Current (360Watt): 12 Vdc / 30A
24 Vdc / 15A
48 Vdc / 7.5A
- ◆ Ripple Noise: 12 Vdc / 100 mVp-p
24 Vdc / 150 mVp-p
48 Vdc / 250 mVp-p
- ◆ Vibration: 10 Hz ~ 2 KHz, 3 axise
- ◆ Temperature Coefficient: 100ppm / °C (0~60°C)
- ◆ Operating Temperature: -20~50°C
- ◆ Operating Humidity: <95% RH (non-condensing)
- ◆ Storage Temperature: -40~70°C
- ◆ Storage Humidity: <95% RH (non-condensing)
- ◆ Power Supply: AC 110 / 220V ± 15%
- ◆ Installation: DIN rail 35mm

ORDER INFORMATION

AD1 [Code 1] - [Code 2]

Code 1	Output Watt	Code 2	Output Voltage
240	240 Watt	12S	DC 12V
360	360 Watt	24S	DC 24V
		48S	DC 48V

WIRING CONNECTION

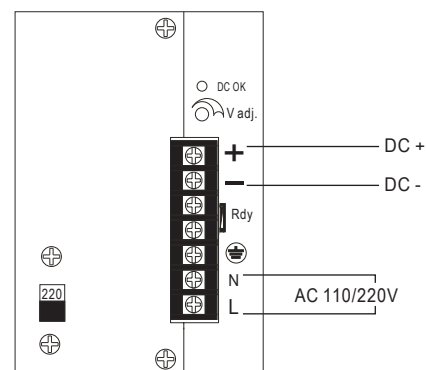

DIMENSION

