

- Accuracy: $\pm 0.2\%$ F.S. $\pm 0.5^{\circ}\text{C}$ (Cold junction compensation); 0.1% F.S. (PT-100)
- Measuring Temperature (TC) sensors for K, J, E, R, S, B, T, PT-100
- Measuring sensor disconnection
- High brightness 0.4" LED display range: -1999~9999
- $^{\circ}\text{C}/^{\circ}\text{F}$ unit selectable
- 2 alarms output / RS-485 communication optional
- Din rail mounting available, easily installation



SPECIFICATION

- ◆ Accuracy: 0.1% F.S. (PT-100)
0.2% F.S. $\pm 0.5^{\circ}\text{C}$ (CJ compensation)
- ◆ Display Screen: High brightness red LED; 10.16mm (0.4")
- ◆ Sampling Cycle: 16 cycles / sec
- ◆ Display Range: -1999~9999
- ◆ Over Range Indication: doFL or -doFL
- ◆ Disconnect. Indication: Automatic with "OPeN" indication
- ◆ Parameters Setting: Push buttons
- ◆ Exciting Power: DC 15~30V
- ◆ Open Collect Output: DC 30V; 30mAdc max.
- ◆ Alarm Action: " \geq (Hi) on" or "< (Lo) on"
- ◆ Alarm Run Delay Time: 0~99 sec
- ◆ Communication: RS-485 Modbus RTU mode
- ◆ Baud Rate: 9600 / 4800 / 2400 bps
- ◆ Temp. Coefficient: 100ppm/ $^{\circ}\text{C}$ (0~60 $^{\circ}\text{C}$)
- ◆ Operating Temperature: 0~60 $^{\circ}\text{C}$; 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70 $^{\circ}\text{C}$; 20~90% RH (non-condensing)
- ◆ Power Supply: DC 12/24/30~90V
- ◆ Surge Test: 1.5kVac / 1min (Input / Output / Power)
- ◆ Material: Sensor: Steel 316
Head mount: Aluminum
Display housing: ABS

ORDER INFORMATION


MGT - [Code 1] - [Code 2]

Code 1	Input Type
T1	K - J - E type
T2	R - S - B - T type
T3	PT-100 Ω


Code 2	Analog Output
N	None
Y	O.C.*2 & RS-485

WIRING CONNECTION

•PT-100 Ω

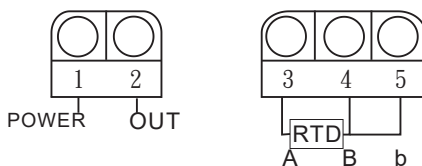

•K, J, E, R, S, B, T

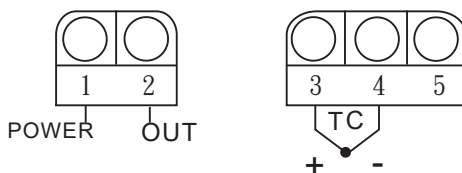

DIMENSION

