



- Input: Analog 4-20mA
- Output: RS-485, Relay

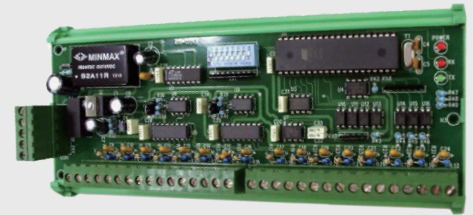

SPECIFICATION

- ◆ Channels : 16
- ◆ Input : DC 4~20mA (Analog input)
- ◆ Operating Temp. : 0~60°C / Below 80%R.H.
- ◆ Storage Temp. : -10~70 / Below 70% R.H.
- ◆ Power Supply : DC 24 ±20%
- ◆ Dielectric Strength : AC 1500V/1min (Input/ Power)
- ◆ Insulation Resistance : More than 100M at 500VDC
- ◆ Mounting : DIN rail
- ◆ Dimensions : 203(W) x 81(H)mm
- ◆ Output : RS-485
- ◆ Protocol : Modbus RTU mode
- ◆ Baudrate : 9600 or 19200

DIP SWITCH



SW	Description
1	Address bit 0
2	Address bit 1
3	Address bit 2
4	Address bit 3
5	Address bit 4
6	Address bit 5
7	OFF = None parity check , 1 stop bit ON = None parity check , 2 stop bit
8	OFF = Baud rate 9600 ON = Baud rate 19200

WIRING CONNECTION

