

- Accuracy: $\pm 0.1\%$ F.S. ± 1 digit (DC); $\pm 0.2\%$ F.S. ± 1 digit (AC)
- Max. Hold / Data Hold / Reset / 1~2 Alarms (Hi or Lo) programmable / Analog output (16 bit resolution) / RS-485 communication optional (3 output options select 1)
- High brightness 0.8" LED display range: -9999~9999; decimal point selectable
- 4 Input signals & display selectable function available (S01~S03)
- High stability, non-flammable case (PC), high safety

SPECIFICATION

- ◆ Accuracy: $\pm 0.1\%$ F.S. ± 1 digit (DC)
 $\pm 0.2\%$ F.S. ± 1 digit (AC)
- ◆ Display Screen: High brightness red LED; 20.3mm(0.8")
- ◆ Sampling Time: 60 cycles / sec
- ◆ Display Range: -9999~9999
- ◆ Zero Adjustment: -9999~9999
- ◆ Over Range Indication: doFL / ioFL or -doFL / -ioFL
- ◆ Polarity Indication: Automatic with "-" indication
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Alarm Action: " $\geq$ (Hi) on" or "< (Lo) on"
- ◆ Alarm Hysteresis Range: 0~9999
- ◆ Alarm Run Delay Time: 0~9999 sec
- ◆ Relay Contact: AC 250V / 5A; DC 30V / 5A
- ◆ Analog Output Resolution: 16 bit
- ◆ Output Response Time: <250 msec (0~90%)
- ◆ Output Capability: Voltage Output: <20mA
Current Output: <10V
- ◆ Communication: RS-485 Modbus RTU mode
- ◆ Baud Rate: 19200 / 9600 / 4800 / 2400 bps
- ◆ Temperature Coefficient: 100ppm / $^{\circ}\text{C}$ (0~60 $^{\circ}\text{C}$)
- ◆ Operating Temperature: 0~60 $^{\circ}\text{C}$
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70 $^{\circ}\text{C}$
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC100~240V ; DC 9~30V
- ◆ Power Consumption: 6.5VA with 2 Relays; 3VA without Relay
- ◆ Surge Test: 2KVac / 1min (Input / Power)
- ◆ Input Impedence: Voltage: >2V for 20K Ω / V; $\leq 2\text{V}$ for >200M Ω
Current: $\geq 0.2\text{A}$ at 100mV; <0.2A at 1V
- ◆ Dimensions: 96(W)*48(H)*85(D) mm
- ◆ Weight: About 300 g

ORDER INFORMATION


MA4 - Code1 Code2 - Code3 - Code4

Code1	Input Type	Compound Input	Code3	Aux. Power	Code4	Output
D	DC	S01 0~10Vdc/0~5Vdc/ 4~20mAdc/0~20mAdc	A	AC/DC100~240V	N	None
A	AC AVG		C	DC 9~30V	R1	1 Relay
M	AC TRMS	S02 0~500Vac/0~50Vac/ 0~5Aac/0~1Aac			R2	2 Relays
P	3 Wire Potentiometer				V	0~10V
I	2 Wire Resistor	S03 0~500Vdc/0~50Vdc/ 0~100mVdc/0~50mVdc			A	4~20mA
T	PT-100				Y	RS-485
L	Load Cell	After select Compound Input, could not select Code2.			O	Option
2	2, 3 Wire Sensor					
4	4 Wire Sensor					


Code2	Voltage	Current	Potentiometer	Resistor	Load Cell
V1	0~50mV	A1 0~20uA	P1 500 Ω ~10K Ω	I1 0~10 Ω	L1 1mV/V EX.5V
V2	0~5V	A2 0~200uA	P2 10K Ω ~100K Ω	I2 0~100 Ω	L2 2mV/V EX.5V
V3	1~5V	A3 0~2mA	P3 100K Ω ~1M Ω	I3 0~1K Ω	L3 3mV/V EX.5V
V4	0~10V	A4 0~20mA	PO Option	I4 0~10K Ω	
V5	0~36V	A5 0~200mA		I5 0~100K Ω	Temp. (PT-100)
V6	0~300V	A6 4~20mA		IO Option	T1 -50~50 $^{\circ}\text{C}$
V7	0~600V	A7 0~2A			T2 -100~100 $^{\circ}\text{C}$
VO	Option	A8 0~5A			T3 -200~200 $^{\circ}\text{C}$
		A9 0~10A			T4 0~600 $^{\circ}\text{C}$
		AO Option			TO Option

WIRING CONNECTION


Compound Input (S01,S02,S03)

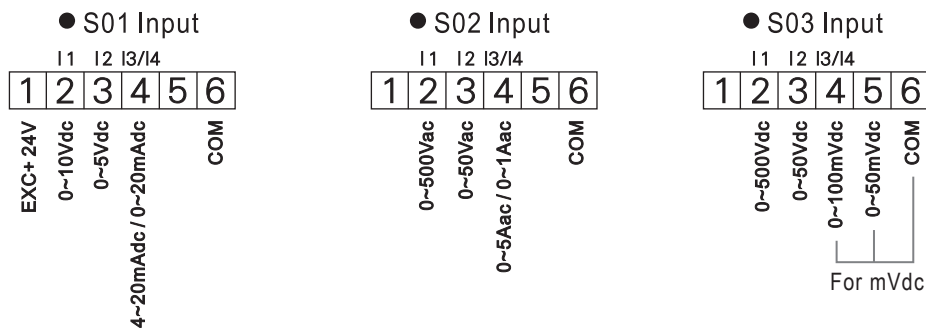

Input Function

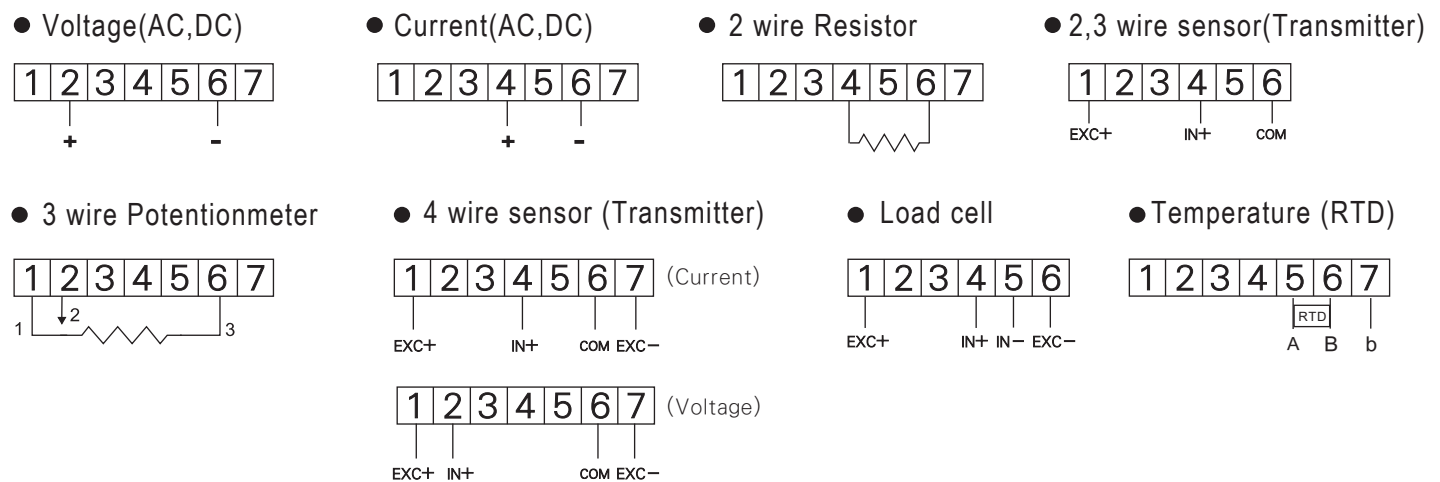

Output Function

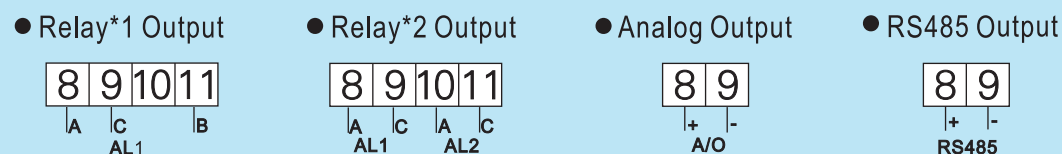

Power

