

- Accuracy: $\pm 0.1\%$ F.S. ± 1 digit (DC / Potentiometer / Resistor / PT-100 / Load Cell)
 $\pm 0.2\%$ F.S. ± 1 digit (AC)
- Measuring AC, DC Voltage / AC, DC Current / Potentiometer / Resistor / PT-100 / Load Cell)
- High brightness dual LED display range: -199999~999999; decimal point selectable
- Baud rate up to 38400 bps; sampling time up to 60 cycles / sec
- Restore factory calibration setting available
- Buzzer / Root square / Analog output simulation function available
- Max. Hold / Data Hold / Reset / 1~4 Alarms (Hi or Lo) programmable / Analog output (15 bit resolution) / RS-485 communication optional (The above options can exist together)
- High stability, non-flammable case (PC), high safety
- CE approval

SPECIFICATION

◆ Accuracy:	$\pm 0.1\%$ F.S. ± 1 digit (DC / Potentiometer / Resistor / PT-100 / Load Cell) $\pm 0.2\%$ F.S. ± 1 digit (AC)	◆ Output Response Time:	<250 msec (0~90%)
◆ Display Screen:	High brightness red LED; 14.22mm(0.56")	◆ Output Capability:	Voltage Output: <20mA Current Output: <10V
◆ Sampling Time:	60 cycles / sec	◆ Communication:	RS-485 Modbus RTU mode
◆ Display Range:	-199999~999999	◆ Baud Rate:	38400 / 19200 / 9600 / 4800 bps
◆ Zero Adjustment:	-199999~999999	◆ Temperature Coefficient:	100ppm / °C (0~60°C)
◆ Over Range Indication:	doFL / ioFL or -doFL / -ioFL	◆ Operating Temperature:	0~60°C
◆ Polarity Indication:	Automatic with "-" indication	◆ Operating Humidity:	20~90% RH (non-condensing)
◆ Parameters Setting:	Push buttons	◆ Storage Temperature:	-10~70°C
◆ Back Up Memory:	EEPROM	◆ Storage Humidity:	20~90% RH (non-condensing)
◆ Alarm Action:	" $\geq$ (Hi) on" or "< (Lo) on"	◆ Power Supply:	AC/DC 100~240V; DC 12 / 24 / 30~90V
◆ Alarm Run Delay Time:	0~99 sec	◆ Power Consumption:	8.5VA (all functions output)
◆ Relay Contact:	AC 277V / 7A; DC 30V / 7A	◆ Surge Test:	1.5KVac / 1min (Input / Power)
◆ Analog Output Resolution:	15 bit	◆ Input Impedence:	Voltage: >2V for 20K Ω / V; $\leq 2V$ for >200M Ω Current: $\geq 0.2A$ at 100mV; <0.2A at 1V

ORDER INFORMATION

GA6 - [Code 1] [Code 2] - [Code 3] - [Code 4] [Code 5] [Code 6]

Code 1	Input Type	Code 2	Voltage	Code 2	Current	Code 2	Potentiometer	Code 2	Resistor	Code 2	RTD (PT-100)	Code 2	Load Cell	Code 3	Aux. Power	Code 5	Analog Output
D	DC	V1	0~50mV	A1	0~20uA	P1	500 Ω ~10K Ω	I1	0~10 Ω	T1	-50~50°C	L1	1mV/V EX.5V	A	AC/DC100~240V	N	None
A	AC AVG	V2	0~5V	A2	0~200uA	P2	10K Ω ~100K Ω	I2	0~100 Ω	T2	-100~100°C	L2	2mV/V EX.5V	B	DC 12V	A	4~20mA
M	AC TRMS	V3	1~5V	A3	0~2mA	P3	100K Ω ~1M Ω	I3	0~1K Ω	T3	-200~200°C	L3	3mV/V EX.5V	C	DC 24V	V	0~10V
P	3 Wire Potentiometer	V4	0~10V	A4	0~20mA	PO	Option	I4	0~10K Ω	T4	0~600°C	L4	1mV/V EX.10V	D	DC 30~90V	O	Option
I	2 Wire Resistor	V5	0~36V	A5	0~200mA			I5	0~100K Ω	TO	Option	L5	2mV/V EX.10V				
T	RTD (PT-100)	V6	0~300V	A6	4~20mA			IO	Option			L6	3mV/V EX.10V				
L	Load Cell	V7	0~600V	A7	0~2A							LO	Option				
2	2, 3 Wire Sensor	VO	Option	A8	0~5A												
4	4 Wire Sensor			A9	0~10A												
				AO	Option												


- **1: 2 wire type offers excitation power DC24V for 2 wire (Loop Power) pressure, temperature, humidity sensors using.
 2: Please specify the input signal and display value, inquiry salespersons for special type.
 3: Load Cell type of excitation power DC5V can have 2 load cell in parallel; DC10V only can offer 1 load cell to use.
 4: 3 Relay type only offers A(Normal/Open) output. O.C. (Open Collect) offers NPN of C.E. output.

Code 4	Alarm Output	Code 6	RS-485
N	None	N	None
R2	2 Relays	Y	Yes
R3	3 Relays		
R4	4 Relays		
O2	2 Open Collect		
O3	3 Open Collect		
O4	4 Open Collect		


WIRING CONNECTION

2 Alarms Output:


- Voltage, Current (AC, DC)

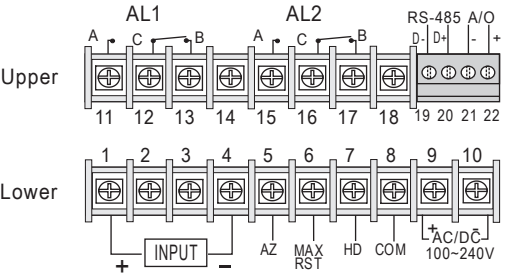


- Temperature (RTD)

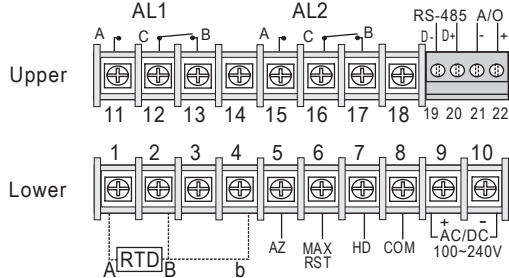


- 2 Wire Resistor

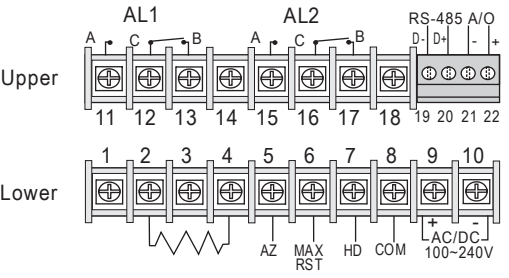


- 3 Wire Potentiometer

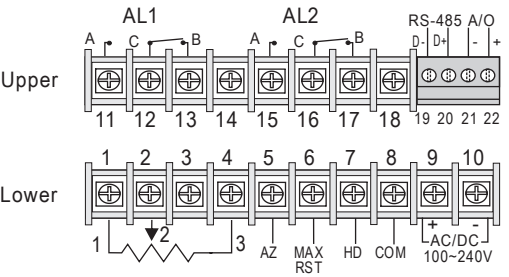

- 4 Wire Sensor or Load cell

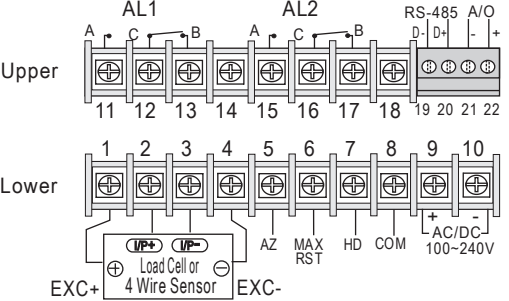


- 2,3 Wire Sensor

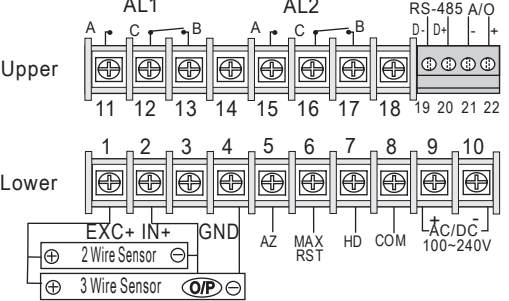


4 Alarms Output:


- Voltage, Current (AC, DC)

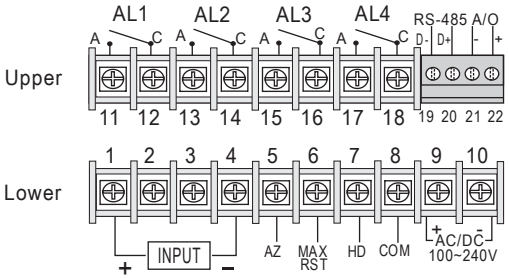


- Temperature (RTD)

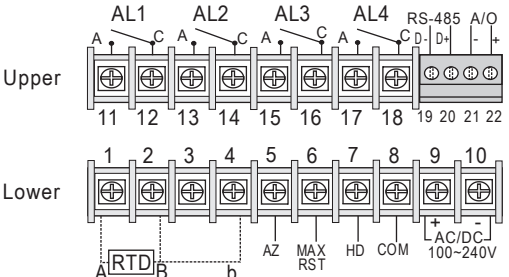


- 2 Wire Resistor

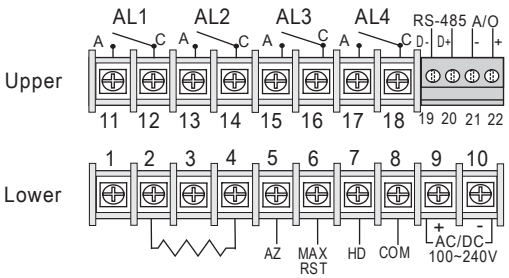

- 3 Wire Potentiometer

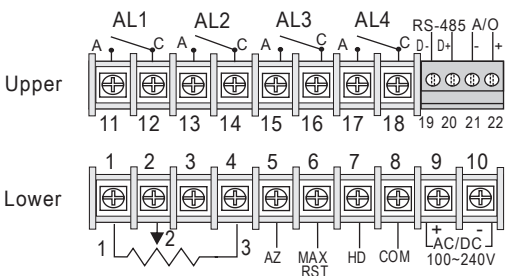

- 4 Wire Sensor or Load cell

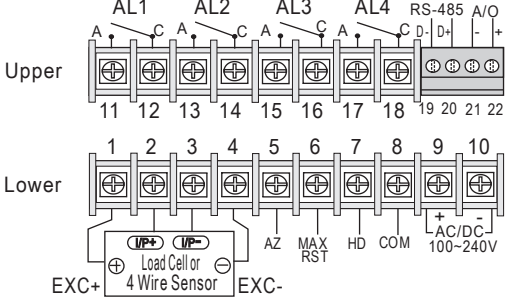

- 2,3 Wire Sensor

