


- Anodized aluminum case
- Rod material: stainless steel
- Adjustable fixed holder; easily installation
- Protection: IP55
- Suitable for small spaces, such like: medical equipments, automatic doors, light industry machines and so on



SPECIFICATION

- ◆ Independent Linear: $\pm 0.1\%$ (10~75mm); $\pm 0.05\%$ (100~300mm)
- ◆ Repeatability Accuracy: 0.01mm
- ◆ Power Supply Current: $\leq 1\text{mA}$
- ◆ Storage Temp.: $-60^{\circ}\text{C} \sim 150^{\circ}\text{C}$
- ◆ Max Speed: 5 m/s


Feature \ Model	10	15	25	50	75	100	125	150	175	200	225	250	275	300
Measuring Range (A.E.) mm	10	15	25	50	75	100	125	150	175	200	225	250	275	300
Resistance (T.E.) $\pm 20\%$ K Ω	1 K Ω					5 K Ω								
Mechanical Travel (M.T.) mm	13	18	28	53	78	103	128	153	178	203	228	253	278	303
Housing Length (A) mm	66.5	71.5	81.5	106.5	131.5	156.5	181.5	206.5	231.5	256.5	281.5	306.5	331.5	356.5

ORDER INFORMATION

DFM - Code1

Code1	Measuring Range(mm)
	010, 015, 025, 050, 075, 100, 125
	150, 175, 200, 225, 250, 300

CONNECTOR DIMENSION

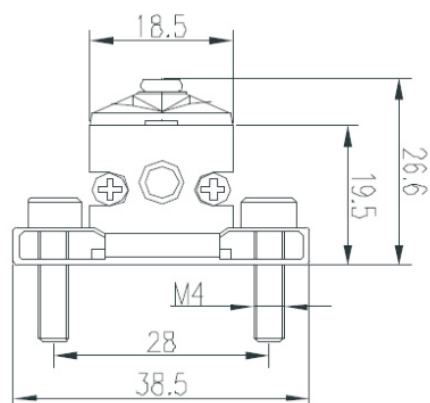

DIMENSION

