

- Accuracy: $\pm 0.5\%$ F.S.
- Measuring range: $\pm 100 / 0\sim 100 / 0\sim 300 / 0\sim 500 / 0\sim 1000 / 0\sim 1500 / 0\sim 2000 / 0\sim 2500 / 0\sim 5000$ pa
- Service in Air and non-combustible, compatible gases
- 4 Digital LCD Display
- Adjustable Zero set point
- Option of Response Time and Measure ange
- Power supply: DC 10~30V; Output: 4~20mAdc

SPECIFICATION

- ◆ Accuracy: $\pm 0.5\%$ F.S.
- ◆ Zero Pressure Offset: 4mAdc
- ◆ Full Scale Output: 20mAdc
- ◆ Max Transfer: 32mA
- ◆ Power Consumption: Supply-10V / 0.020A
- ◆ Max Pressure: 25kPa
- ◆ Dimension Pressure: 50kPa
- ◆ Response Time: 0.8/4s
- ◆ Water Proof: IP54
- ◆ Materials: ABS
- ◆ Electrical Connection: 1.5mm²,M12
- ◆ Pressure Connection: Male, $\phi 5.00$ m and 6.3mm
- ◆ Operating Temperature: -10~50°C
- ◆ Operating Humidity: <95% RH (non-condensing)
- ◆ Storage Temperature: -10~50°C
- ◆ Storage Humidity: <95% RH (non-condensing)
- ◆ Power Supply: DC10~30V
- ◆ With LCD Display Weight: 290 g
- ◆ No LCD Display Weight: 150 g


ORDER INFORMATION

DPS - Code1 - Code2 - Code3

Code1	Input Range	Code2	Display Screen	Code3	Signal Output
N100	± 100 Pa	N	No	A	DC4-20mA(2W)
100	0-100 Pa	D	Yes	Y	RS-485 Modbus RTU
300	0-300 Pa				
500	0-500 Pa				
1000	0-1000 Pa				
1500	0-1500 Pa				
2000	0-2000 Pa				
2500	0-2500 Pa				
5000	0-5000 Pa				

WIRING CONNECTION

● 2 wire

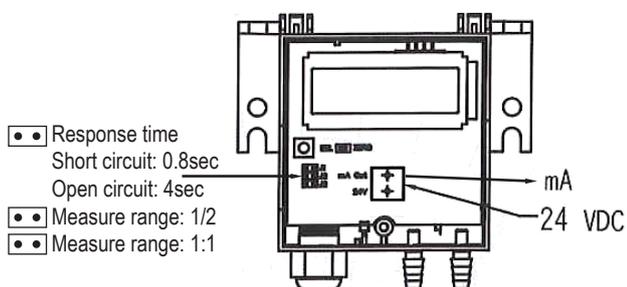

● RS-485 Modbus RTU

