



- The standard wire length is 1M (up to 10M).
- Output: 2 sets of Relays.

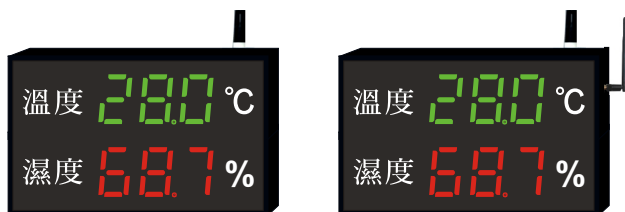

DCCH-23 Temp. + Humi. 2.3" (with sensor)

DCCH-23LR Temp. + Humi. 2.3" (with sensor)

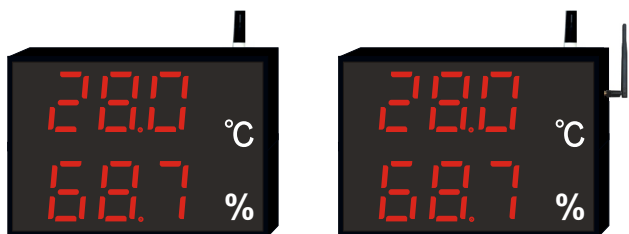

DCCH-40 Temp. + Humi. 4.0" (with sensor)

DCCH-40LR Temp. + Humi. 4.0" (with sensor)

Model : DCCH



• 4 inches (10cm): 3 digits, 370*300*60mm (L*H*D).

4 digits, 450*300*60mm (L*H*D)

• 2.3 inch (5.8cm): 3/4/5 digits, 370*200*60mm (L*H*D).

※ 4 Chinese font shall be added to the left side of inch display panel, and the length shall be increased by 100mm※.

TEMP. & HUMI. SENSOR ACCURACY.

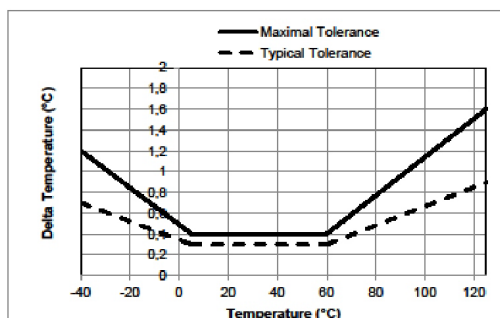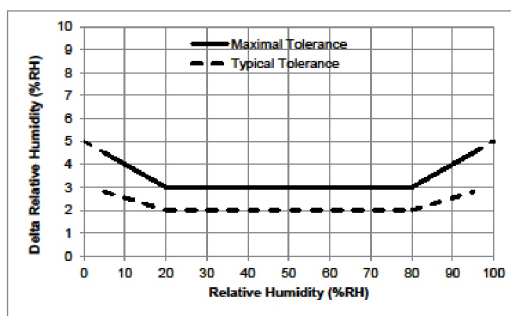

TEMP. & HUMI.

Range	Sensor
0~99°C/0~99.9%	Fully calibrated, digital output
-30.0~100.0°C/0~99.9%	

Relay output (option) : AC 230V/DC 24V, 5A

RS-485 output (option) : Modbus RTU mode

ORDER INFORMATION

DCCH/ DCCT - **Code1** - **Code2** **Code3** **Code4** **Code5**

Code1 Digits	Code2 LED dimension	Code3 Output
3 3	2 2.3 inch	1 Relay*2
4 4	4 4.0 inch	2 RS-485
		3 Relay*2+RS-485
		LR LoRa
Code4 Sensor	Code5 Power	
1 Sensor	1 DC24V	
2 Wire 1M	2 AC100~240V, 50/60Hz	
3 Option		