


- T-series.(Wire length 1M)
- Split core, easy installation(50mm).
- Primary input 800A~1200A.
- Secondary output 5Aac.
- Safe operation.
- Please do not use while the circuit is open.
Be sure to connect the load device at first.



SPECIFICATION

- ◆ Frequency: 50~60 Hz
- ◆ Rated Current: 800A to 1200A loads
- ◆ Rated Output: 5A (AC)
- ◆ Accuracy: Class 0.5: 200A, 250A, 300A, 400A, 500A, 600A, 800A, 1000A, 1200A
- ◆ Phase angle: 1.0: 200A/ 0.8: 250A, 300A, 400A, 500A, 600A, 800A, 1000A, 1200A
- ◆ Insulation Voltage: 600 Vac
- ◆ Max. Primary Voltage: 5000 Vac (Insulated Conductor)
- ◆ Dielectric Strength: 2.0KV/ 50Hz/ 1min
- ◆ Operating Temp.: -30°C to 70°C
- ◆ Operating Humi.: <85%
- ◆ Case Material: PC/UL94~V0
- ◆ Bobbin: PBT
- ◆ Core: Pure copper
- ◆ Internal Structure: Epoxy
- ◆ Burden: 200/ 5A Ø50mm 600/ 5A Ø50mm
250/ 5A Ø50mm 800/ 5A Ø50mm
300/ 5A Ø50mm 1000/ 5A Ø50mm
400/ 5A Ø50mm 1200/ 5A Ø50mm
500/ 5A Ø50mm

DIMENSION

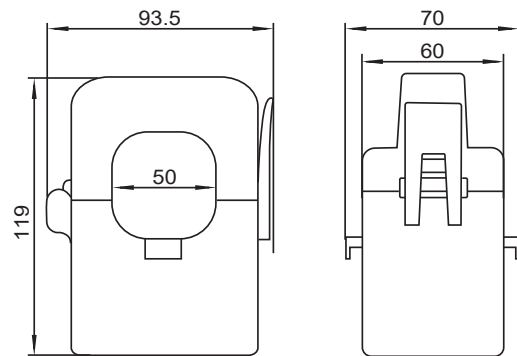

Unit: mm

ORDER INFORMATION

DCSCT-50T - Code1 - Code2 - Code3

Code1	Input Signal	Code2	Output	Code3	Wire Length
200	200 Aac	5	5 Aac	N	1 M
250	250 Aac			O	Option
300	300 Aac				
400	400 Aac				
500	500 Aac				
600	600 Aac				
800	800 Aac				
1000	1000 Aac				
1200	1200 Aac				