

■ PT-100 class A

01C.D1797 P0K1.232.6W.A.008


- ◆ Resistivity: 100Ω at 0 °C
- ◆ Tolerance: DIN EN 60751 F 0.15
- ◆ T.-Range: -200 °C-+600 °C
- ◆ Dimension: 2.3x2x1.3mm(LxWxH)
- ◆ Contacts: Pt/Ni-wire, Ø0.2mm, 3mm long

*RoHS compliant

■ K type class A

- ◆ Thickness: 0.25mm
- ◆ Thickness: 0.26mm
- ◆ Voltage Test: 100 Vx1min
- ◆ Room Temp: 26°C
- ◆ Humidity: 48%
- ◆ Insulation Resist: 20MΩ up

*RoHS compliant

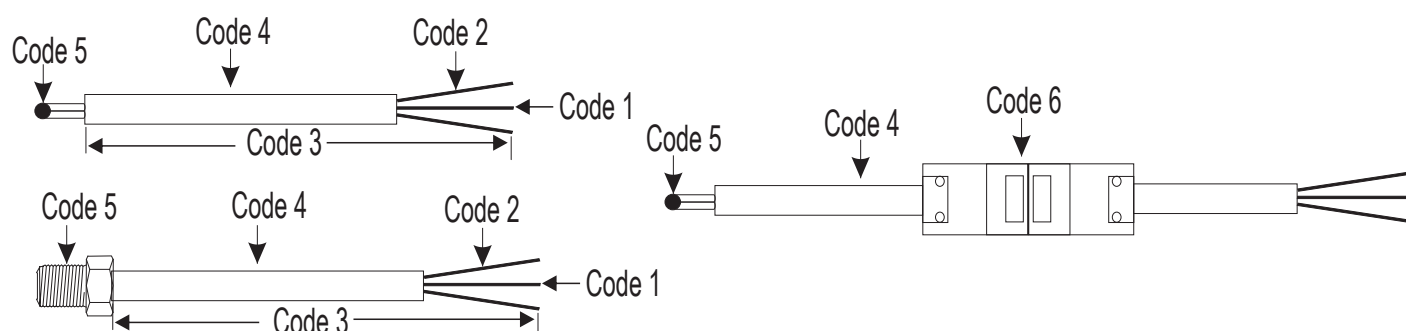

ORDER INFORMATION

BTC - [Code 1] - [Code 2] - [Code 3] [Code 4] - [Code 5] [Code 6]

Code 1	Input Type
K	K Type
J	J Type
E	E Type
T	T Type
R	R Type
P	RTD (PT-100)

Code 2	Wiring Diameter
A	0.16 Single Core
B	0.32 Single Core
C	0.65 Single Core
D	0.32 Multi Core
E	0.65 Multi Core

Code 3	Wiring Length
03	30 cm
05	50 cm
08	80 cm
10	1 M
20	2 M
30	3 M
50	5 M
80	8 M
A0	10 M
B5	25 M
AA	100 M
CA	300 M
O	Option

Code 4	Wiring Material
C	Glass Fiber
D	Hot-Resistant
F	Iron
P	PVC
T	Teflon
O	Option

Code 5	Connection
0	Extension Wire
1	Solder
2	Screw Nut

Code 6	Connection
N	None
H	Socket (Big)
I	Socket (Small)