

■ PT-100 class A

01C.D1797 P0K1.232.6W.A.008


- ◆ Resistivity: 100Ω at 0 °C
- ◆ Tolerance: DIN EN 60751 F 0.15
- ◆ T.-Range: -200 °C~+600 °C
- ◆ Dimension: 2.3x2x1.3mm(LxWxH)
- ◆ Contacts: Pt/Ni-wire, Ø0.2mm, 3mm long

*RoHS compliant

■ K type class A

- ◆ Thickness: 0.25mm
- ◆ Thickness: 0.26mm
- ◆ Voltage Test: 100 Vx1min
- ◆ Room Temp: 26°C
- ◆ Humidity: 48%
- ◆ Insulation Resist: 20MΩ up

*RoHS compliant

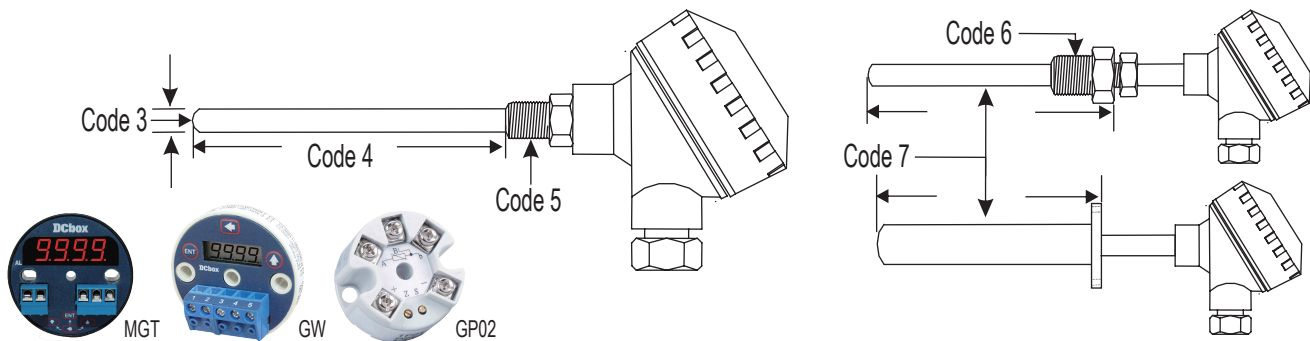

ORDER INFORMATION

BTS - [Code 1] [Code 2] - [Code 3] - [Code 4] [Code 5] - [Code 6] - [Code 7] - [Code 8] - [Code 9]

Code 1	Input Type	Code 2	Temp. Range	Code 3	Tube Diameter	Code 4	Tube Length	Code 5	Connection	Code 6	Inner Tube Diameter	Code 7	Thermo-Well	Code 8	Wiring Type	Code 9	Transmitter
K	K Type	1	-50~50 °C	3	3.2 mm	03	30 mm	N	None	N	None	N	None	B	KN Box	GP	GP02
J	J Type	2	0~50 °C	4	4.8 mm	05	50 mm	1	1/4" PT	3	3.2 mm	1	Overheat 50mm	M	KS Box	GW	GW
E	E Type	3	0~100 °C	5	5.0 mm	08	80 mm	2	3/8" PT	4	4.8 mm	2	Sliding Tube	T	TL Box	MGT	MGT
T	T Type	4	0~200 °C	6	6.3 mm	10	100 mm	3	1/2" PT	5	5.0 mm	3	Flange	U	TS Box		
R	R Type	5	0~400 °C	9	9.5 mm	20	200 mm	4	3/4" PT	6	6.3 mm	4	Teflon Tube	W	Window		
P	RTD (PT-100)	6	0~600 °C	A	12.3 mm	30	300 mm	5	1" PT	9	9.5 mm	5	Magnetic Tube	BB	Big Bakelite		
		7	0~1000 °C	O	Option	50	500 mm	A	1/4" NPT	A	12.3 mm	6	Titanium Tube	MB	Small Bakelite		
		8	0~1200 °C			80	800 mm	B	3/8" NPT	O	Option	O	Option	O	Option		
		9	0~1600 °C			A0	1000 mm	C	1/2" NPT								
		O	Option			B0	2000 mm	D	3/4" NPT								
						O	Option	E	1" NPT								
								O	Option								