


- 快速連接和斷開
- 衛生應用
- 易於清潔
- 此隔膜密封可安裝於壓力錶. 開關. 傳送器等, 為阻隔具有腐蝕性. 黏性與自然沉澱的傳感元件, 以避免阻塞和固化
- 應用於食品. 奶類飲品. 奶製品. 醫藥工業



規格特性

- ◆範圍 : -1kg/cm²~21kg/cm²
- ◆工作溫度 : -20°C~140°C 或根據每次填充液
- ◆本體牙口 : 3/8" BSP(F)
- ◆接續牙口 : 1 1/2" 衛生密封(無夾具和密封墊)
- ◆隔膜材質 : AISI316LSS
- ◆本體材質 : AISI316SS
- ◆填充油 : 食品級用油

尺寸圖

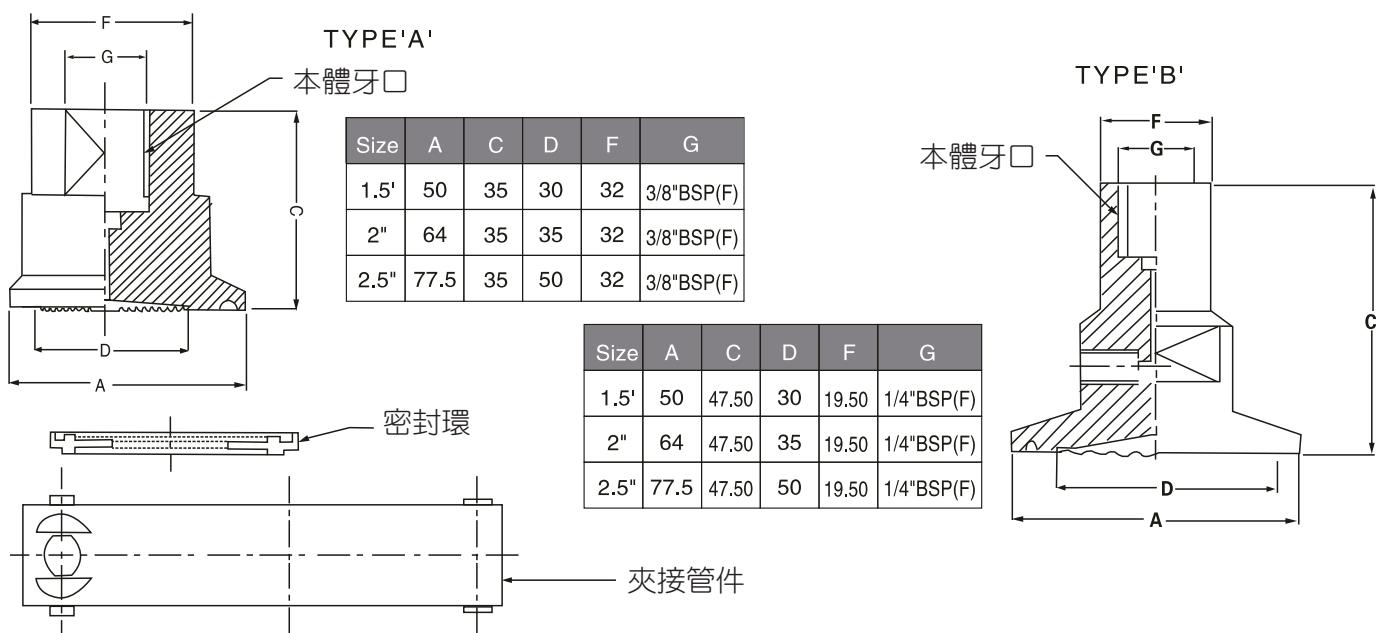

選用型號規格

BASIC MODEL

BBU

OPTIONS

AB1

TYPE

AB1 TYPEA AB2 TYPEB

FOR NON STANDARD PRODUCTS/OPTIONAL ITEMS, PLEASE CONTACT FACTORY FOR DELIVERY AND MINIMUM QUANTITY OF ORDER.

Q6

INSTRUMENT CONNECTION 本體牙口

Q6 3/8"BSP(F) Q4 1/2"BSP(F)
Q1 1/2"NPT(F) Q3 1/4"BSP(F)
Q5 3/8"NPT(F) Q2 1/4"NPT(F)

T8

DIAPHRAGM 隔膜材質

T8 AISI 316L SS

O23

PROCESS CONNECTION 接續牙口

Q23 1 1/2"SANITARY SEAL IN AISI 316 SS
Q24 2" SANITARY SEAL IN AISI 316 SS
Q25 1/2" SANITARY SEAL IN AISI 316 SS

Z1

CLAMP 夾具尺寸

Z1 1 1/2"CLAMP AISI 304 SS
Z2 2"CLAMP AISI 304 SS
Z3 2 1/2"CLAMP AISI 304 SS

*Note: Above does not include bottom mating part. If required, please refer to factory.

AA1

MATING PARTS 隔膜尺寸
AA1 1 1/2"SANITARY SEAL IN AISI 316 SS
AA2 2" SANITARY SEAL IN AISI 316 SS
AA3 2 1/2" SANITARY SEAL IN AISI 316 SS

G1

TYPE

G1 WITHOUT CAPILLARY G2 WITH CAPILLARY
G3 WITHOUT NECK TYPE G4 NECK TYPE

H1

CAPILLARY
H1 AISI 304 SS H2 AISI 316 SS

I1

CAPILLARY COVERED WITH ARMOUR
I1 AISI 304 SS I2 AISI 316 SS I3 PVC

1Mtr.

CAPILLARY LENGTH (Max up to 2Mtrs.)

IN METERS (e.g. 1.5)= 1.5METERS 2.0=2METERS

K3

OTHER OPTIONS

K3 HELIUM LEAK TEST K4 DRY SEAL ONLY WITHOUT INSTRUMENT

Ordering Example:

BBU-AB1-Q6-T8-O23-Z1-AA1-G1-H1-I1-1Mtr.-K3

Note: • Due to continuous improvement, the specification